
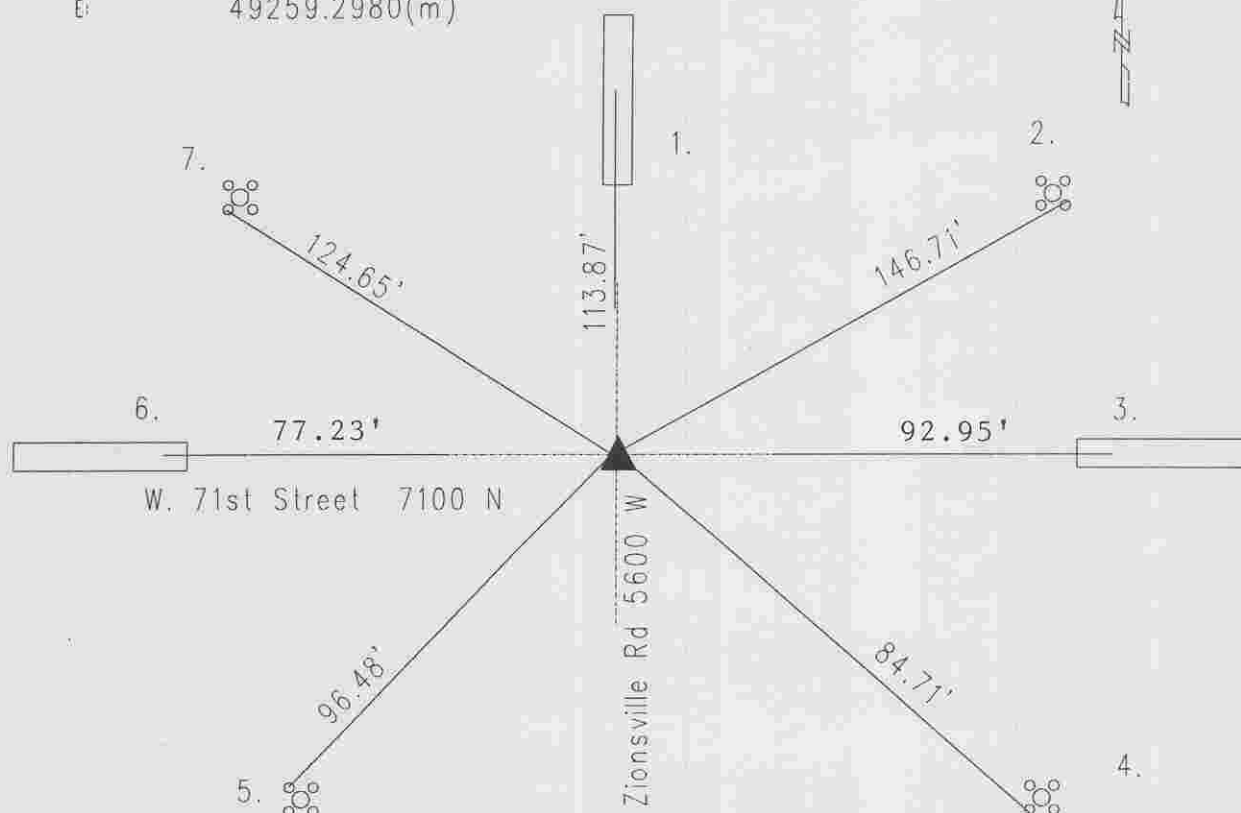


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 36 TOWNSHIP 17 RANGE 2
DATE: --4-23-2000-- 5-9-05
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 1-8-90

IN. S.P.C. E ZONE, NAD 83
NAME: 17023601
N: 514545.0200(m)
E: 49259.2980(m)

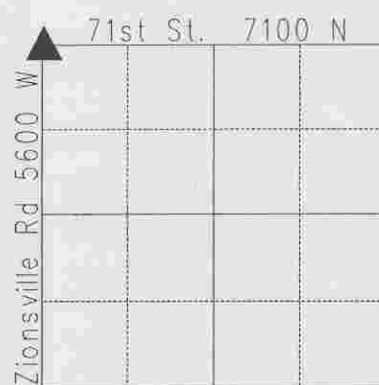

Original post set 1853 by D.B. Hasbrook with witnesses: 20" oak S 70 E 84 links, 18" beech S 62 W 24 links, stone set. SeFranka re-tied corner 11-10-71 and called corner 'a' cut 'x' in brass plug. Numerous other ties were pulled and called for a cut 'x' on brass plug. Excavated 1-8-90 and set Harrison. Re-tied 4-23-2000 by Wilcoxon.

HC723601

| REF. | DISTANCE | DESCRIPTION |
|------|----------|---------------------------------------|
| 1. | 113.87' | Due N to Cut 'x' in S-end of median |
| 2. | 146.71' | Cut 'x' SE-bolt of aluminum pole base |
| 3. | 92.95' | Due E to cut 'x' in W-end of median |
| 4. | 84.71' | Cut 'x' SE-bolt of aluminum pole base |
| 5. | 96.48' | Cut 'x' NW-bolt aluminum pole base |
| 6. | 77.23' | Due W to cut 'x' E-end of median |
| 7. | 124.65' | Cut 'x' SW-bolt aluminum pole base |
| | | |
| | | |
| | | |